

03/02/00  
jc490 U.S. PTO

LAW OFFICES  
**SUGHRUE, MION, ZINN, MACPEAK & SEAS, PLLC**  
2100 PENNSYLVANIA AVENUE, N.W.  
WASHINGTON, DC 20037-3213  
TELEPHONE (202) 293-7060  
FACSIMILE (202) 293-7860  
www.sughrue.com

March 2, 2000

**BOX PATENT APPLICATION**  
Assistant Commissioner for Patents  
Washington, D.C. 20231

jc530 U.S. PTO  
09/517691  
03/02/00

Re: Application of Miek DEKEYSER

**BROADCASTING UNIT TO BROADCAST DISTRIBUTIVE INTERACTIVE  
SERVICES IN AN ACCESS NETWORK**  
Our Ref. Q058016

Dear Sir:

Attached hereto is the application identified above including 12 sheets of the specification, claims and abstract, 3 sheets of formal drawings, executed Assignment and PTO 1595 form, and executed Declaration and Power of Attorney. Also enclosed is the Information Disclosure Statement.

**Please see attached preliminary amendment before calculating Government filing fee.**

The Government filing fee is calculated as follows:


Total claims	4 - 20	=	0	x	\$18.00	=	\$0.00
Independent claims	1 - 3	=	0	x	\$78.00	=	\$0.00
Base Fee							\$690.00

<b>TOTAL FILING FEE</b>	<b>\$690.00</b>
Recordation of Assignment	\$40.00
<b>TOTAL FEE</b>	<b>\$730.00</b>

Checks for the statutory filing fee of \$690.00 and Assignment recordation fee of \$40.00 are attached. You are also directed and authorized to charge or credit any difference or overpayment to Deposit Account No. 19-4880. The Commissioner is hereby authorized to charge any fees under 37 C.F.R. §§ 1.16 and 1.17 and any petitions for extension of time under 37 C.F.R. § 1.136 which may be required during the entire pendency of the application to Deposit Account No. 19-4880. A duplicate copy of this transmittal letter is attached.

Priority is claimed from March 31, 1999 based on European Application No. 99400792.0. The priority document will be filed at a later date.

Respectfully submitted,  
SUGHRUE, MION, ZINN,  
MACPEAK & SEAS, PLLC  
Attorneys for Applicant

By:   
David J. Cushing  
Registration No. 28,703



said channel selector, and adapted to broadcast said channels to said user terminals; a request receiver, adapted to receive from one of said user terminals first type request information indicative for at least one requested channel; and a request handler, coupled between said request receiver and a control input of said channel selector, and adapted to interpret said first type request information and to control said channel selector to select said at least one requested channel, wherein the request handler further is adapted to check whether said at least one requested channel is available at said input of said broadcasting unit and wherein said broadcasting unit further comprises: a request generator, coupled to said request handler and adapted to generate in case said at least one requested channel is not available at said input of said broadcasting unit second type request information indicative for said unavailable requested channel; and a request transmitter, coupled to said request generator and adapted to transmit said second type request information to another broadcasting unit.

The invention is also directed to an access network including a plurality of such broadcasting units arranged in a multi-level topology.--;

Page 2, line 8, delete "by claim 1" and insert --above--.

Page 3, line 4, delete "defined by claim 2" and insert --that the request generator is adapted to generate said second type request information in accordance with a standard zapping protocol already used for said first type request information--.

line 11, delete "defined by claim 3 and insert --that the request generator is adapted to generate said second type request information in accordance with a standard signalling protocol--.

after line 16, insert the heading: --**Brief Description of the Drawings**--.

Page 4, before line 1, insert the heading: --**Detailed Description of the Invention**--.

PRELIMINARY AMENDMENT  
Attorney Docket Q58016


**IN THE ABSTRACT:**

After the heading, delete the title in its entirety.

**REMARKS**

Entry and consideration of this Amendment is respectfully requested.

Respectfully submitted,



David J. Cushing  
Registration No. 28,703

SUGHRUE, MION, ZINN,  
MACPEAK & SEAS, PLLC  
2100 Pennsylvania Avenue, N.W.  
Washington, D.C. 20037-3213  
Telephone: (202) 293-7060  
Facsimile: (202) 293-7860

Date: March 2, 2000

## ACCESS NETWORK

5 characteristic part of claim 1 and an access network including such broadcasting units as defined in the non-characteristic part of claim 4.

of Express Trunks and Interactive Services Over a Second Bandwidth Portion of Each Express Trunk on a Subscriber Demand Basis'. Therein, an interactive television information system is described wherein each broadcasting unit, named headend in the cited US Patent, broadcasts fixed television channels via a first bandwidth portion and broadcasts selected television channels in response to subscriber requests via a second bandwidth portion. The television channels selected in response to subscriber requests and broadcasted via the second bandwidth portion are selected amongst all television channels supplied to an input of the headend or broadcasting unit. A drawback of the known interactive television information system is that all television channels have to be supplied to inputs of all broadcasting units in the access network. Even if none of the subscribers served by a broadcasting unit request a certain television channel, this channel will be available at the input of this broadcasting unit. Consequently, a significant amount of the transfer capacity of the links in the known access network is inefficiently used to transfer television channel information that is not requested by the subscribers to the broadcasting units that serve these subscribers.

An object of the present invention is to provide a broadcasting unit and access network similar to the known one, but which allow to more efficiently use the transfer capacity of links in the access network.

According to the invention, this object is achieved by the broadcasting unit defined by claim 1 and the access network defined by claim 4.

Indeed, broadcasting units according to the present invention can be arranged in a multi-level topology. A central broadcasting unit receives all television channels at its input and may be connected to second level broadcasting units via links that can carry a limited number of television channels. The second level broadcasting units are located closer to the subscribers and are of the type defined by claim 1. Upon request of one of the subscribers, a second level broadcasting unit either broadcasts a television channel if it is available at its input or requests the central broadcasting unit to be provided with the requested television channel. Summarising, according to the present invention, a multi-level topology of broadcasting units wherein not all television channels are permanently supplied to all broadcasting units in the access network, reduces the access network resource occupancy significantly without affecting the quality of service vis-à-vis the subscribers.

Moreover, since the access network does not need the capability to transfer all television channels that are offered to a subscriber to the broadcasting unit that serves this subscriber, the number of television channels that can be offered to a subscriber in systems wherein the present invention is implemented is higher than in the prior art system.

It is to be noticed that the term 'comprising', used in the claims, should not be interpreted as being limitative to the means listed thereafter. Thus, the scope of the expression 'a device comprising means A and B' should not be limited to devices consisting only of components A and B. It means that with respect to the present invention, the only relevant components of the device are A and B.

Similarly, it is to be noticed that the term 'coupled', also used in the claims, should not be interpreted as being limitative to direct connections only. Thus, the scope of the expression 'a device A coupled to a device B' should not be limited to devices or systems wherein an output of device A is directly connected to an input

002000 16921550

of device B. It means that there exists a path between an output of A and an input of B which may be a path including other devices or means.

An additional feature of the broadcasting unit according to the present invention is defined by claim 2.

5 In this way, when using a standard zapping protocol for second type request information sent from a broadcasting unit close to the subscribers to a more central broadcasting unit, the central broadcasting unit can be implemented by a known broadcasting unit, such as the ones described for instance in the already mentioned United States Patent US 5,557,316.

10 An alternative additional feature of the broadcasting unit according to the present invention is defined by claim 3.

In this way, when using a standard signalling protocol for second type request information sent from a broadcasting unit close to the subscribers to a central broadcasting unit, the central broadcasting unit can be implemented by a  
15 known broadband switching node. Such a broadband switching node is capable of interpreting the standard signalling protocol.

The above mentioned and other objects and features of the invention will become more apparent and the invention itself will be best understood by referring to the following description of an embodiment taken in conjunction with the  
20 accompanying drawings wherein:

Fig. 1 illustrates the architecture of an embodiment of the known access network ACCESS NETWORK' wherein interactive distributive services are broadcasted;

Fig. 2 illustrates the architecture of an embodiment of the access network  
25 ACCESS NETWORK according to the present invention wherein interactive distributive services are broadcasted; and

Fig. 3 is a functional block scheme of an embodiment of the broadcasting unit BCU2 according to the present invention.

002020 16921560

The known access network ACCESS NETWORK' drawn in Fig. 1 contains several broadcasting units similar to the broadcasting unit BCU1 that is drawn. To each of these broadcasting units N television channels TV1, TV2, TV3, ..., TVN are supplied and each of the broadcasting units serves a number of user terminals. The  
5 broadcasting unit BCU1 for example is bi-directionally coupled to the user terminals UT1, UT2 and UT3 to be able to broadcast television channels thereto via a downlink and to receive channel request information therefrom via an uplink.

In the access network ACCESS NETWORK' of Fig. 1, N television channels TV1, TV2, TV3, ..., TVN can be selected by each subscriber. When selecting a  
10 television channel, the user terminal UT1, UT2 or UT3 of the subscriber sends request information indicative for the selected television channel via the uplink to the broadcasting unit BCU1 that serves this user terminal UT1, UT2 or UT3. For upstream transmission of the channel request information, the user terminal UT1, UT2 or UT3 uses a standard zapping protocol, like for example the ISO DSM-CC  
15 channel change protocol. The broadcasting unit BCU1 is able to interpret this standard zapping protocol, and upon receipt of the channel request information selects the requested television channel amongst the N channels TV1, TV2, TV3, ..., TVN supplied to its input and broadcasts this television channel over the downlink towards the user terminals UT1, UT2 and UT3 served by this broadcasting unit  
20 BCU1. This downlink typically has a limited capacity so that the broadcasting unit BCU cannot permanently broadcast all television channels TV1, TV2, TV3, ..., TVN towards the user terminals UT1, UT2 and UT3.

The just described working of the known interactive television channel distribution system requires that all television channels TV1, TV2, TV3, ..., TVN that  
25 can be selected by the subscribers are permanently supplied to inputs of all broadcasting units in the access network ACCESS NETWORK'. To offer each subscriber the choice over N television channels TV1, TV2, TV3, ..., TVN the links towards each broadcasting unit need at least the capacity to transfer these N television channels. In case some links in the known access network ACCESS



NETWORK' do not permanently have this capacity, the limited transport capacity of the links towards the broadcasting units puts constraints on the number of television channels that can be selected by the subscribers.

5 The access network ACCESS NETWORK drawn in Fig. 2 contains a central broadcasting unit BCU1, broadcasting units BCU2 and BCU3 located close to the subscribers, and user terminals UT1, UT2, UT3, UT4 and UT5. To an input of the central broadcasting unit BCU1, the N television channels TV1, TV2, TV3 , ..., TVN are supplied and this central broadcasting unit BCU1 is coupled bi-directionally to the broadcasting units BCU2 and BCU3 via up- and downlinks. The downlinks  
10 between the central broadcasting unit BCU1 and the broadcasting units BCU2 and BCU3 have a limited capacity. These links are supposed to be able to carry at most four television channels. In the drawing Fig. 2, the central broadcasting unit BCU1 supplies the television channels TV1, TV2, TV3 and TV4 to the broadcasting unit BCU2, and supplies the television, channels TV1, TV4, TV5 and TV7 to the  
15 broadcasting unit BCU3. The broadcasting unit BCU2 is bi-directionally coupled to the user terminals UT1, UT2 and UT3 whereas the broadcasting unit BCU3 is bi-directionally coupled to the user terminals UT4 and UT5. These bi-directional couplings in the access network ACCESS NETWORK drawn in Fig. 2 are realised through separate up- and downlinks but it is evident that this is not necessary for  
20 implementation of the present invention. The downlinks towards the user terminals UT1, UT2, UT3 UT4 and UT5 are supposed to have a capacity of at most three television channels. At the moment considered in Fig. 2, the broadcasting unit BCU2 downstream broadcasts television channels TV1 and TV2 towards the user terminals UT1, UT2 and UT3, and broadcasting unit BCU3 is supposed to broadcast  
25 television channels TV1 and TV5 towards the user terminals UT4 and UT5. Via the uplink towards the broadcasting unit BCU2, user terminal UT1 requests television channel TV3 and user terminal UT2 request television channel TV6.

To explain the working of the broadcasting units BCU2 and BCU3 in accordance with the present invention, the functional components of broadcasting

5 CHANNEL SELECTOR and a channel broadcasting unit CHANNEL BROADCAST.

10 handler REQUEST HANDLER, a channel request generator REQUEST GENERATOR and a channel request transmitter REQUEST TX. The channel request handler REQUEST HANDLER is coupled via an output to a control input of the channel selector CAHANNEL SELECTOR.

15 receives the request from user terminal UT1 for television channel TV3 and the request from user terminal UT2 for television channel TV6. This request information is supplied to the channel request handler REQUEST HANDLER which detects that the requested television channel TV3 is available at its input and therefor controls the channel selector CHANNEL SELECTOR to select television channel TV3 in  
20 addition to television channels TV1 and TV2 for broadcast towards the user terminals UT1, UT2 and UT3. The channel broadcasting unit CHANNEL BROADCAST consequently broadcasts television channels TV1, TV2 and TV3 over the downlink towards the user terminals UT1, UT2 and UT3. The channel request handler REQUEST HANDLER further detects that the requested television channel TV6 is not  
25 available at the input of broadcasting unit BCU2 and therefor instructs the channel request generator REQUEST GENERATOR to ask the central broadcasting unit BCU1 to supply television channel TV6 to the broadcasting unit BCU2. The channel request generator REQUEST GENERATOR in accordance with the ISO DSM-CC channel change protocol generates request information indicating that the

002000 051691 030200

broadcasting unit BCU2 wishes to receive television channel TV6 at its input and this request information is transmitted by the channel request transmitter REQUEST TX over the uplink towards the central broadcasting unit BCU1. In the central broadcasting unit BCU1, the request from the broadcasting unit BCU2 is interpreted and instead of the television channels TV1, TV2, TV3 and TV4, the central broadcasting unit BCU1 transfers the television channels TV1, TV2, TV3 and TV6 via the downlink between the central broadcasting unit BCU1 and broadcasting unit BCU2 towards the latter broadcasting unit BCU2. As soon as the broadcasting unit BCU2 receives the requested television channel TV6 at its input, the channel request handler REQUEST HANDLER instructs the channel selector CHANNEL SELECTOR to select television channel TV6 instead of television channel TV1, so that the channel broadcasting unit CHANNEL BROADCAST now broadcasts television channels TV6, TV2 and TV3 towards the user terminals UT1, UT2 and UT3 thus fulfilling the wishes of all subscribers.

It is noticed that since in the access network ACCESS NETWORK of Fig. 2 the same zapping protocol is used for the transmission of requests from the broadcasting unit BCU2 to the central broadcasting unit BCU1 as is used in the access network ACCESS NETWORK' of Fig. 1 for the transfer of requests from the user terminals UT1, UT2 and UT3 to the broadcasting unit BCU1, the central broadcasting unit BCU1 in Fig. 2 can be realised by the broadcasting unit BCU1 of Fig. 1. Existing broadcasting units in other words can be reused when implementing the present invention. Evidently, this may reduce the time to market of the present invention.

Although a standard zapping protocol like the ISO DSM-CC channel change protocol is used in the above described embodiment of the invention for communication between the user terminals UT1, UT2, UT3, UT4, UT5 and the broadcasting units BCU2 and BCU3 on the one hand, and for communication between the broadcasting units BCU2 and BCU3 and the central broadcasting unit BCU1 on the other hand, it should be remarked that the applicability of the present

invention does not require the use of any particular protocol for transfer of the channel request information. In case the central broadcasting unit BCU1 is a broadband switch node, it is advantageous to use for the channel requests sent from the broadcasting units BCU2 and BCU3 towards the central broadcasting unit BCU1 a standard signalling protocol, like for instance the ITU-T Q.2931 protocol or the ATM Forum 3.1 or 4.0 signalling. This is so because existing broadband switch nodes are able to interpret these standard signalling protocols so that the central broadcasting unit BCU1 can be realised by an existing broadband switch thus allowing fast deployment of the present invention, even in existing access networks.

Yet another remark is that the applicability of the invention is not reduced to telecommunication systems with a particular physical transmission medium or wherein any particular physical layer transmission protocol is used. The invention in other words can be applied in any access system, irrespective of the fact whether the distributive services are provided over twisted pair cables, coaxial cables, optical fibres, radio links, satellite links, or the like, and irrespective of the physical layer protocol (e.g. ADSL - Asymmetric Digital Subscriber Line) that is used to represent the bits on the transmission link.

It is also noticed that although the above described embodiment of the invention contains a two-level hierarchy of broadcasting units, applicability of the present invention is extendable to any access network wherein broadcasting units are arranged in a hierarchy with more than two levels.

Furthermore, it is remarked that an embodiment of the present invention is described above in terms of functional blocks. From the functional description of these blocks it will be obvious for a person skilled in the art of designing electronic devices how embodiments of these blocks can be manufactured with well-known electronic components. A detailed architecture of the contents of the functional blocks hence is not given.

While the principles of the invention have been described above in connection with specific apparatus, it is to be clearly understood that this

Variable	Mean	SD	Min	Max
Age	34.5	10.2	21	55
Gender	0.5	0.5	0	1
Marital status	0.6	0.5	0	1
Education	12.5	1.5	9	16
Income	15.2	5.8	5	35
Health status	0.8	0.4	0	1
Smoking status	0.3	0.5	0	1
Alcohol consumption	0.2	0.4	0	1
Exercise frequency	0.5	0.5	0	1
Stress level	3.2	1.8	1	5
Sleep quality	2.8	1.5	1	5
Work satisfaction	3.5	1.2	1	5
Life satisfaction	4.1	1.0	1	5
Depression score	1.5	1.2	0	3
Anxiety score	1.8	1.3	0	3
Loneliness score	2.1	1.4	0	3
Self-esteem score	2.5	1.1	0	3
Resilience score	2.8	1.0	0	3
Optimism score	3.0	0.9	0	3
Gratitude score	3.2	0.8	0	3
Forgiveness score	3.4	0.7	0	3
Compassion score	3.6	0.6	0	3
Kindness score	3.8	0.5	0	3
Generosity score	4.0	0.4	0	3
Patience score	4.2	0.3	0	3
Humility score	4.4	0.2	0	3
Modesty score	4.6	0.1	0	3
Shyness score	4.8	0.1	0	3
Introversion score	5.0	0.0	0	3
Extroversion score	5.2	0.0	0	3
Sensitivity score	5.4	0.0	0	3
Empathy score	5.6	0.0	0	3
Emotional stability score	5.8	0.0	0	3
Neuroticism score	6.0	0.0	0	3
Conscientiousness score	6.2	0.0	0	3
Agreeableness score	6.4	0.0	0	3
Openness score	6.6	0.0	0	3
Conscientiousness score	6.8	0.0	0	3
Agreeableness score	7.0	0.0	0	3
Openness score	7.2	0.0	0	3
Conscientiousness score	7.4	0.0	0	3
Agreeableness score	7.6	0.0	0	3
Openness score	7.8	0.0	0	3
Conscientiousness score	8.0	0.0	0	3
Agreeableness score	8.2	0.0	0	3
Openness score	8.4	0.0	0	3
Conscientiousness score	8.6	0.0	0	3
Agreeableness score	8.8	0.0	0	3
Openness score	9.0	0.0	0	3
Conscientiousness score	9.2	0.0	0	3
Agreeableness score	9.4	0.0	0	3
Openness score	9.6	0.0	0	3
Conscientiousness score	9.8	0.0	0	3
Agreeableness score	10.0	0.0	0	3

## CLAIMS

5 user terminals (UT1, UT2, UT3), said broadcasting unit (BCU2) thereto comprising:

a. channel selecting means (CHANNEL SELECTOR), adapted to select amongst available channels (TV1, TV2, TV3, TV4) at an input of said broadcasting unit (BCU2) said channels (TV1, TV2) to be broadcasted;

10 channel selecting means (CHANNEL SELECTOR), and adapted to broadcast said  
channels (TV1, TV2) to said user terminals (UT1, UT2, UT3);

c. request receiving means (REQUEST RX), adapted to receive from one of said user terminals (UT1, UT2, UT3) first type request information indicative for at least one requested channel (TV1; TV6); and

15           d. request handling means (REQUEST HANDLER), coupled between said request receiving means (REQUEST RX) and a control input of said channel selecting means (CHANNEL SELECTOR), and adapted to interpret said first type request information and to control said channel selecting means (CHANNEL SELECTOR) to select said at least one requested channel (TV1).

20 CHARACTERIZED IN THAT said request handling means (REQUEST HANDLER) further is adapted to check whether said at least one requested channel (TV1; TV6) is available at said input of said broadcasting unit (BCU2) and in that said broadcasting unit (BCU2) further comprises:

e. request generating means (REQUEST GENERATOR), coupled to said  
25 request handling means (REQUEST HANDLER) and adapted to generate in case said  
at least one requested channel (TV6) is not available at said input of said  
broadcasting unit (BCU2) second type request information indicative for said  
unavailable requested channel (TV6); and

5

10

15

20

## BROADCASTING UNIT TO BROADCAST DISTRIBUTIVE INTERACTIVE SERVICES IN AN ACCESS NETWORK

10

15

requested channels (TV6) is not available at the input of this broadcasting unit (BCU2), the latter broadcasting unit (BCU2) generates second type request information indicative for the unavailable requested channel (TV6) and sends this second type request information to a more central broadcasting unit (BCU1). Thus, a broadcasting unit (BCU2) close to the subscribers upon request of one of the subscribers either broadcasts a requested channel (TV1) to the subscribers or requests a more central broadcasting unit (BCU1) to be provided with the requested channel (TV6).



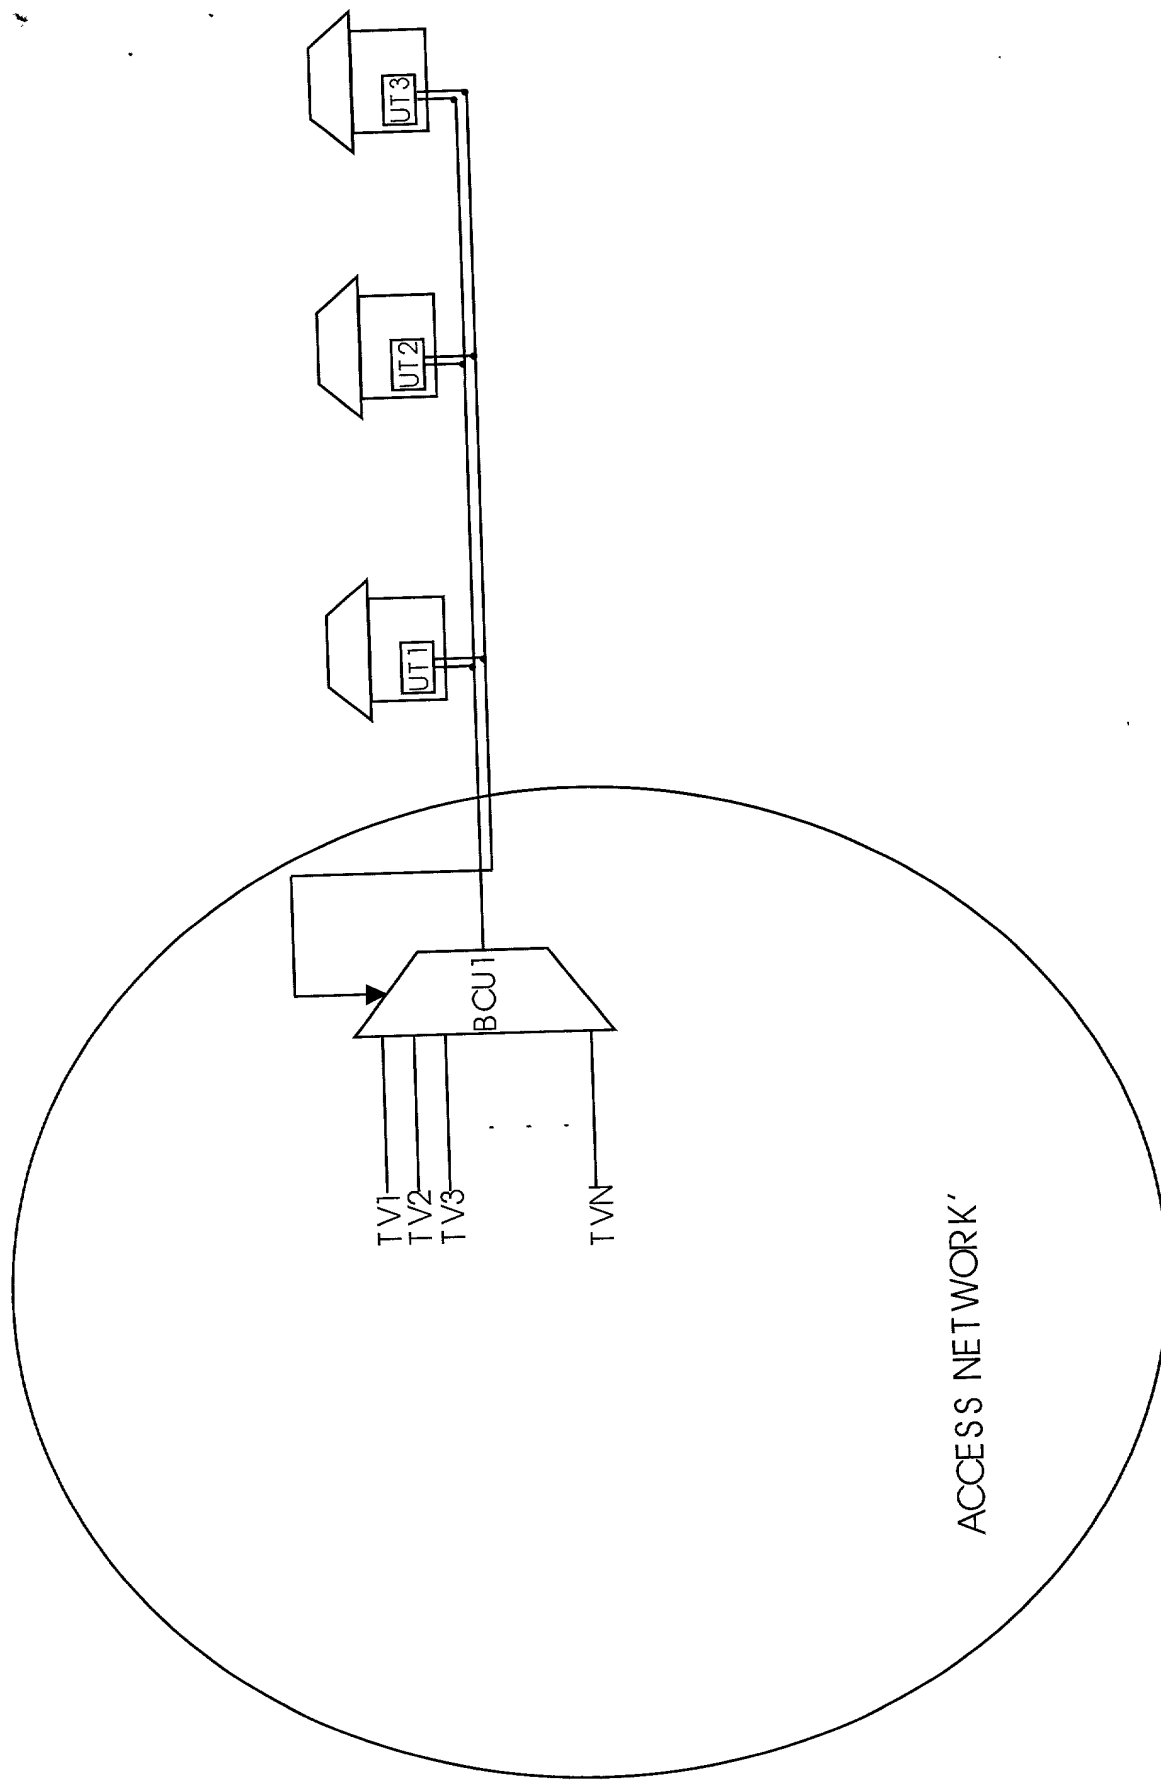


Fig. 1 (Prior Art)

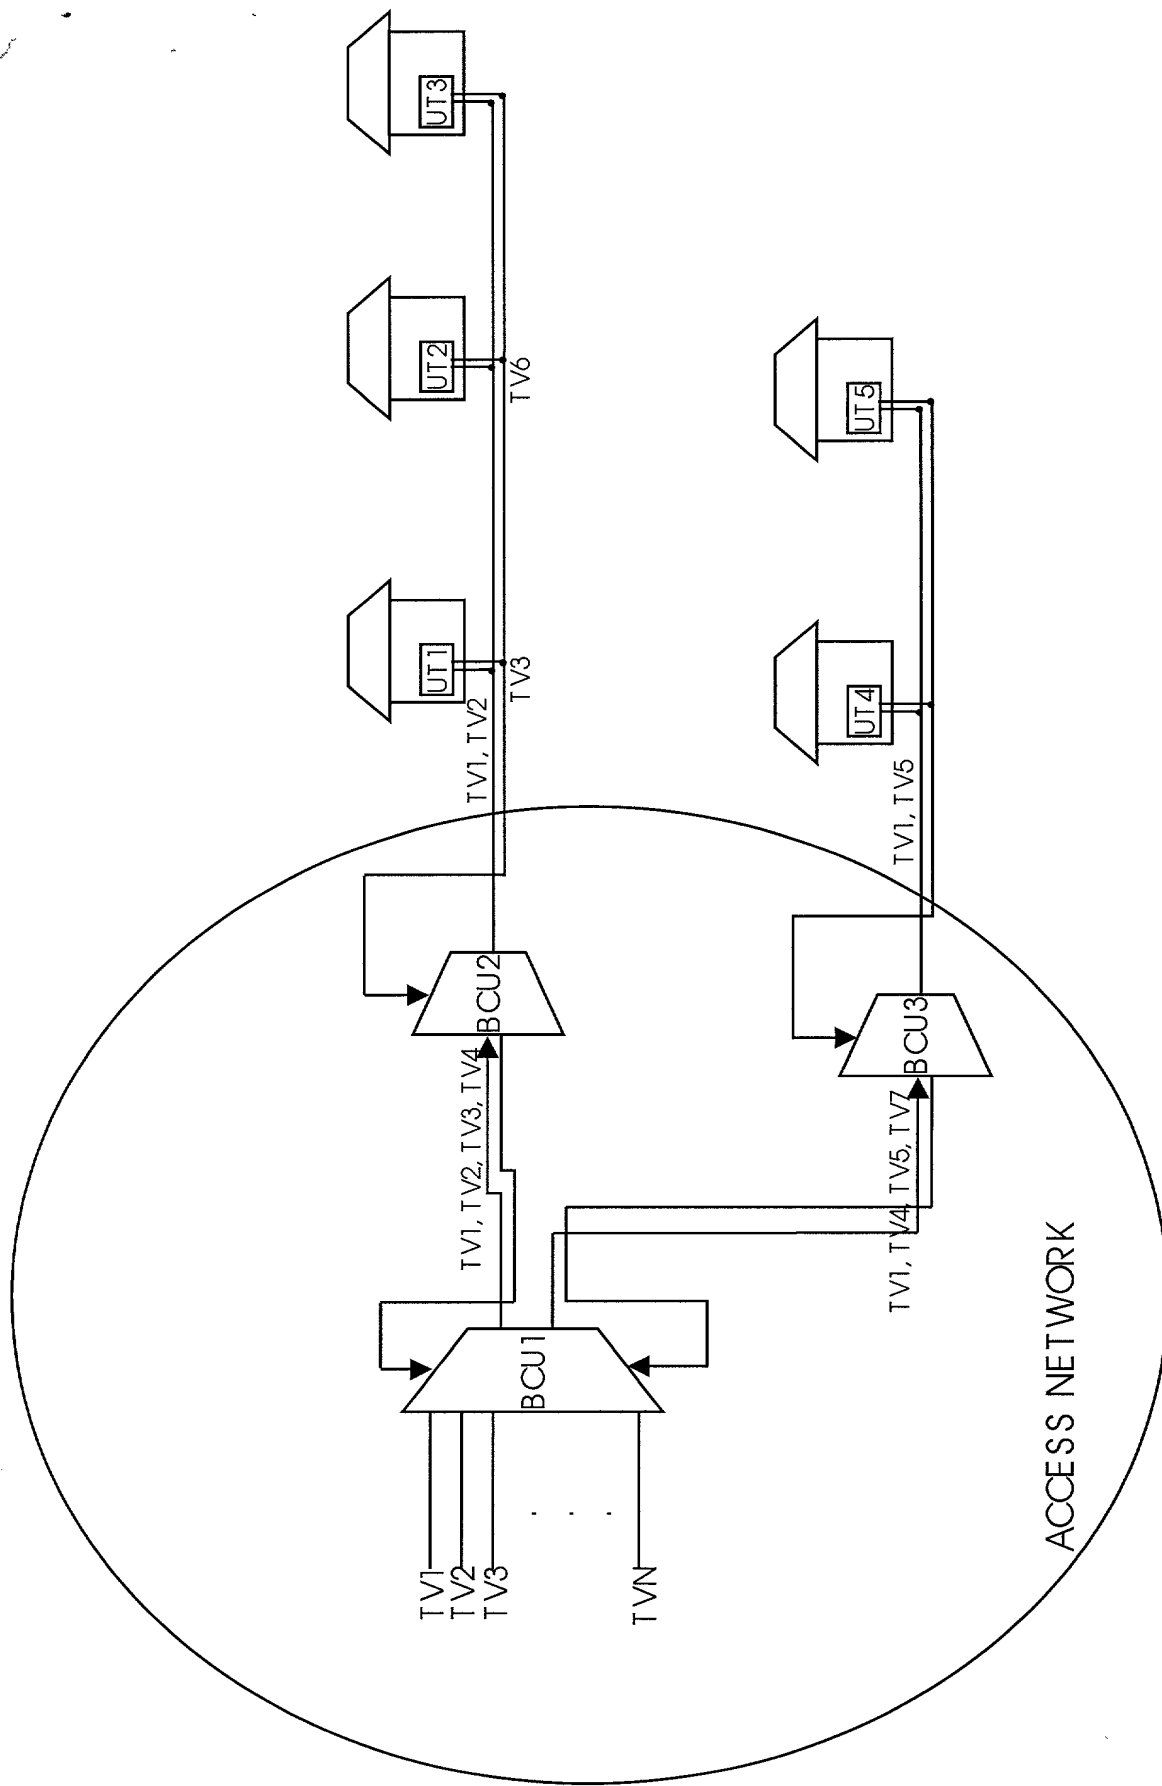


Fig. 2

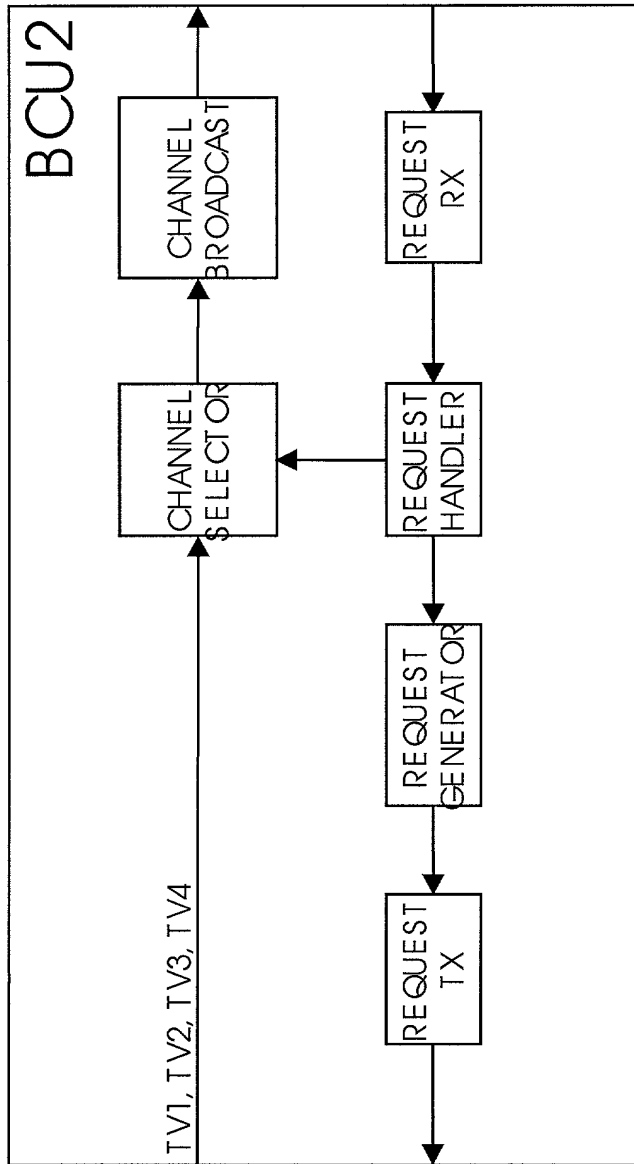


Fig. 3

**DECLARATION AND POWER OF ATTORNEY**

As a below named inventor, I hereby declare that my residence, post office address and citizenship are as stated below next to my name: that I verily believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter claimed and for which a patent is sought in the application entitled:

**BROADCASTING UNIT TO BROADCAST DISTRIBUTIVE INTERACTIVE SERVICES IN AN ACCESS NETWORK**

which application is:

X the attached application  
(for original application)

☐ Application No. \_\_\_\_\_  
filed, and amended on \_\_\_\_\_

(for declaration not accompanying application)

that I have reviewed and understand the contents of the specification of the above-identified application, including the claims, as amended by any amendment referred to above; that I acknowledge my duty to disclose information of which I am aware which is material to the patentability of this application under 37 C.F.R. 1.56, that I hereby claim priority benefits under Title 35, United States Code §119, §172 or §365 of any provisional application or foreign application(s) for patent or inventor's certificate listed below and have also identified on said list any foreign application for patent or inventor's certificate on this invention having a filing date before that of any foreign application on which priority is claimed:

Application Number	Country	Filing Date	Priority Claimed	
			Yes	No
99400792.0	Europe	March 31, 1999	X	<input type="checkbox"/>

I hereby claim the benefit of Title 35, United States Code §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in a listed prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge my duty to disclose any information material to the patentability of this application under 37 C.F.R. 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Application No.	Filing Date	Status
-----------------	-------------	--------

I hereby appoint John H. Mion, Reg. No. 18,879; Thomas J. Macpeak, Reg. No. 19,292; Robert J. Seas, Jr., Reg. No. 21,092; Darryl Mexic, Reg. No. 23,063; Robert V. Sloan, Reg. No. 22,775; Peter D. Olexy, Reg. No. 24,513; J. Frank Osha, Reg. No. 24,625; Waddell A. Biggart, Reg. No. 24,861; Louis Gubinsky, Reg. No. 24,835; Neil B. Siegel, Reg. No. 25,200; David J. Cushing, Reg. No. 28,703; John R. Inge, Reg. No. 26,916; Joseph J. Ruch, Jr., Reg. No. 26,577; Sheldon I. Landsman, Reg. No. 25,430; Richard C. Turner, Reg. No. 29,710; Howard L. Bernstein, Reg. No. 25,665; Alan J. Kasper, Reg. No. 25,426; Kenneth J. Burchfiel, Reg. No. 31,333; Gordon Kit, Reg. No. 30,764; Susan J. Mack, Reg. No. 30,951; Frank L. Bernstein, Reg. No. 31,484; Mark Boland, Reg. No. 32,197; William H. Mandir, Reg. No. 32,156; Brian W. Hannon, Reg. No. 32,778; Abraham J. Rosner, Reg. No. 33,276; Bruce E. Kramer, Reg. No. 33,725; Paul F. Neils, Reg. No. 33,102; Brett S. Sylvester, Reg. No. 32,765; Robert M. Masters, Reg. No. 35,603; George F. Lehnigk, Reg. No. 36,359; John T. Callahan, Reg. No. 32,607 and Steven M. Gruskin, Reg. No. 36,818, my attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and request that all correspondence about the application be addressed to **SUGHRUE, MION, ZINN, MACPEAK & SEAS, PLLC**, 2100 Pennsylvania Avenue, N.W., Washington, D.C. 20037-3213.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Date February 29, 2000 First Inventor Miek DEKEYSER  
 Residence Rumst Belgium Signature D. Keyser Miek Clem Ward Dan  
 City State/Country  
 Post Office Address: Lage Vosbergstraat 91 B-2840 RUMST BELGIUM  
 Citizenship Belgium